

The PROENS relay announcement combinations realize the indication and routing progresses of the all defects and failures that will probably occur on the protection cells in electric networks. It is a micro-controller based device.

There are 8 PCS of announcement Inputs and 3 pcs of announcement Outputs on the device. By way of these Inputs, it becomes able to process and route the defect announcement information.

With the internal buzzer property, the announcement relay can provide sound alarm without the need of external sound alarm hardware.

The transmission of HORN, BELL and INTERNAL FAULT announcements are provided through the output relays.

Relay input configuration can be done by buttons on front panel.

The LEDS that are placed on the device are double colored as GREEN and RED.

The speed of signal processing and signal transmission is lower than 10msec. Thus, the excessive circuit in the high and medium voltage use doesn't interfere in the relay coordination.

Working Principle:

Leds:

1.Led Modes:

*Steady: After the input signal is acknowledged , signal is not exist more.

*Quick Flash : The announcement signal is recognized but it is not confirmed.

*Slow Flash: After the input signal is acknowledged , signal is continuous.

Led Colors:

·Red: Horn ·Green: Bell



BELL-HORN LED: It is Red on Horn Output. It is Green on Bell output. It flashes as red-green on bell and horn output is activated.

FAIL-SAFE LED: It is green on relay is energized and working is normal. It is red on relay is energized and working is not normal.

2.:OUTPUTS

·HORN Relay: It pulls the ignition when an announce-ment input signal.

·Bell Relay: It pulls the ignition when an announcement input signal.

·Fail Safe Relay: When relay is energised it changes position. If relay doesn't change the position its mean is internal fault on relay. By the control of the relay can understand of relay is working or not. This system controls by micro-controller.

3.BUTTONS:

·ACK Button: It provides the recognized announcement information to be confirmed by the operator.

·DEL Button: It switches off the stable continuous leds.

·STOP Button: It releases the Buzzer, Horn and silences the buzzer.


·Lamb Test Button: It is used to check the conditions of the leds. The green and red leds flashes in sequence when it is pushed. It shows the input configuration when holds 3 second duration.

TECHNICAL PROPERTIES

Operating Voltage	24 VDC,48 VDC,110 VDC, 220VDC	Color of Indicator Buttons	Red,Green
Voltage Variation	(0,8-1,2)*Un	Alarm Ack Button	20.000 Presses
Announcement Voltage Input	24,48,110,220 VDC	Lamp Test Button	YES
Announcement Input Current	1mA	Del Button	YES
Contact Currents(Fail Safe Relay)	2A -24VDC,110VDC-0.4A,220VDC-0.2A	Stop Button	YES
Contact Currents(Bell,Horn Relay)	5A-24VDC,110VDC 0.3A	Fail Safe Led	YES
Number of Announcements	8	Horn Bell Led	YES
Number Relay Outputs	3	Assembly	To front of the panel
Internal Sound Alarm	Buzzer * 80db @5cm	Cable Section	2,5 mm max.
Filtering Time	5.5 msec	Operating Temperature	.-20 + 55 °C
Transmission Time	10 msec	Protection Class	IP 20
Indicator	Led 100.000 hour	Weight	*
		Dimensions	96x96x47 mm


SETUP:

1-

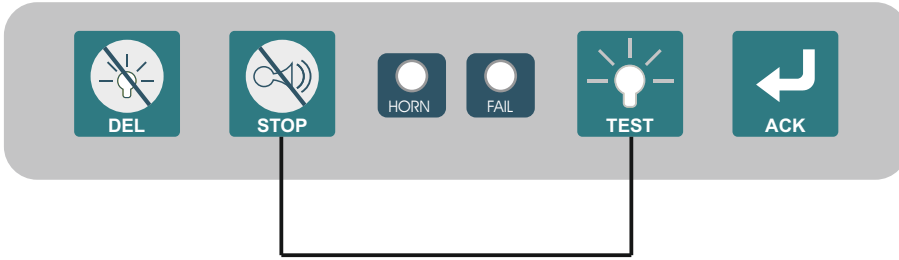

Press the Stop and test button until all leds on apx 3 sec.
When setup menu activated selected channel flashes other leds steady.


2-

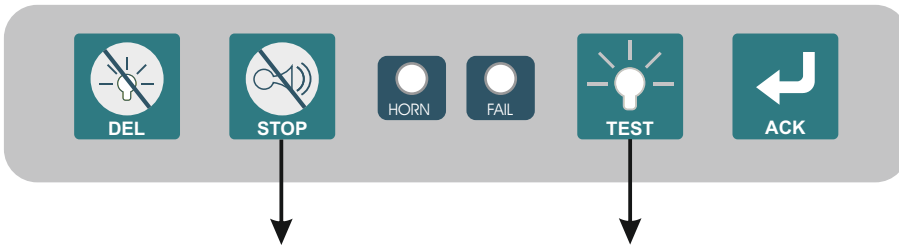

It choose the selected channel is
Red Green
Horn Bell

It changes the channel


3-

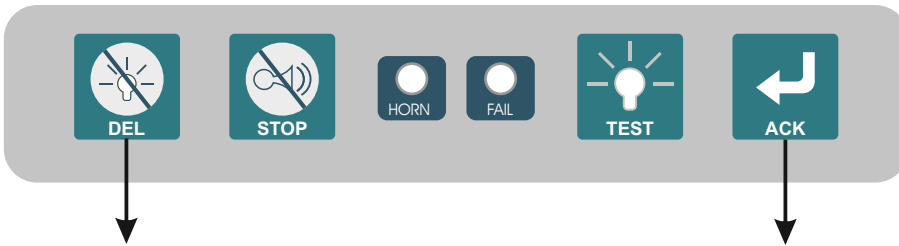


It will cancel the setup.
All selections are invalid.

It records the selections and exits
setup.

CONNECTION DIAGRAM:

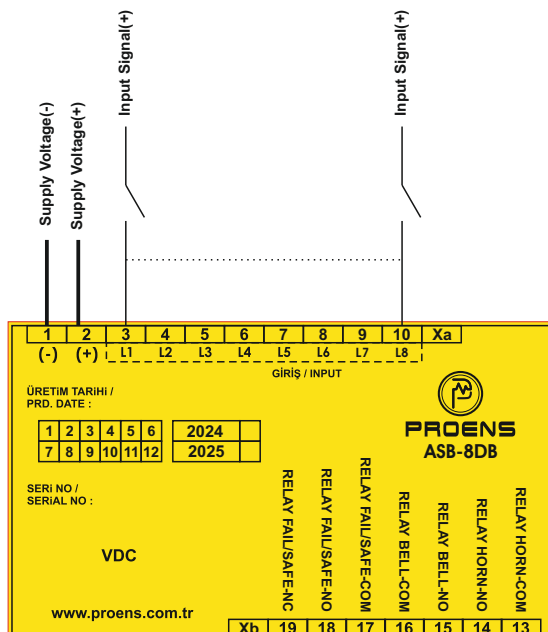

WORKING DIAGRAM

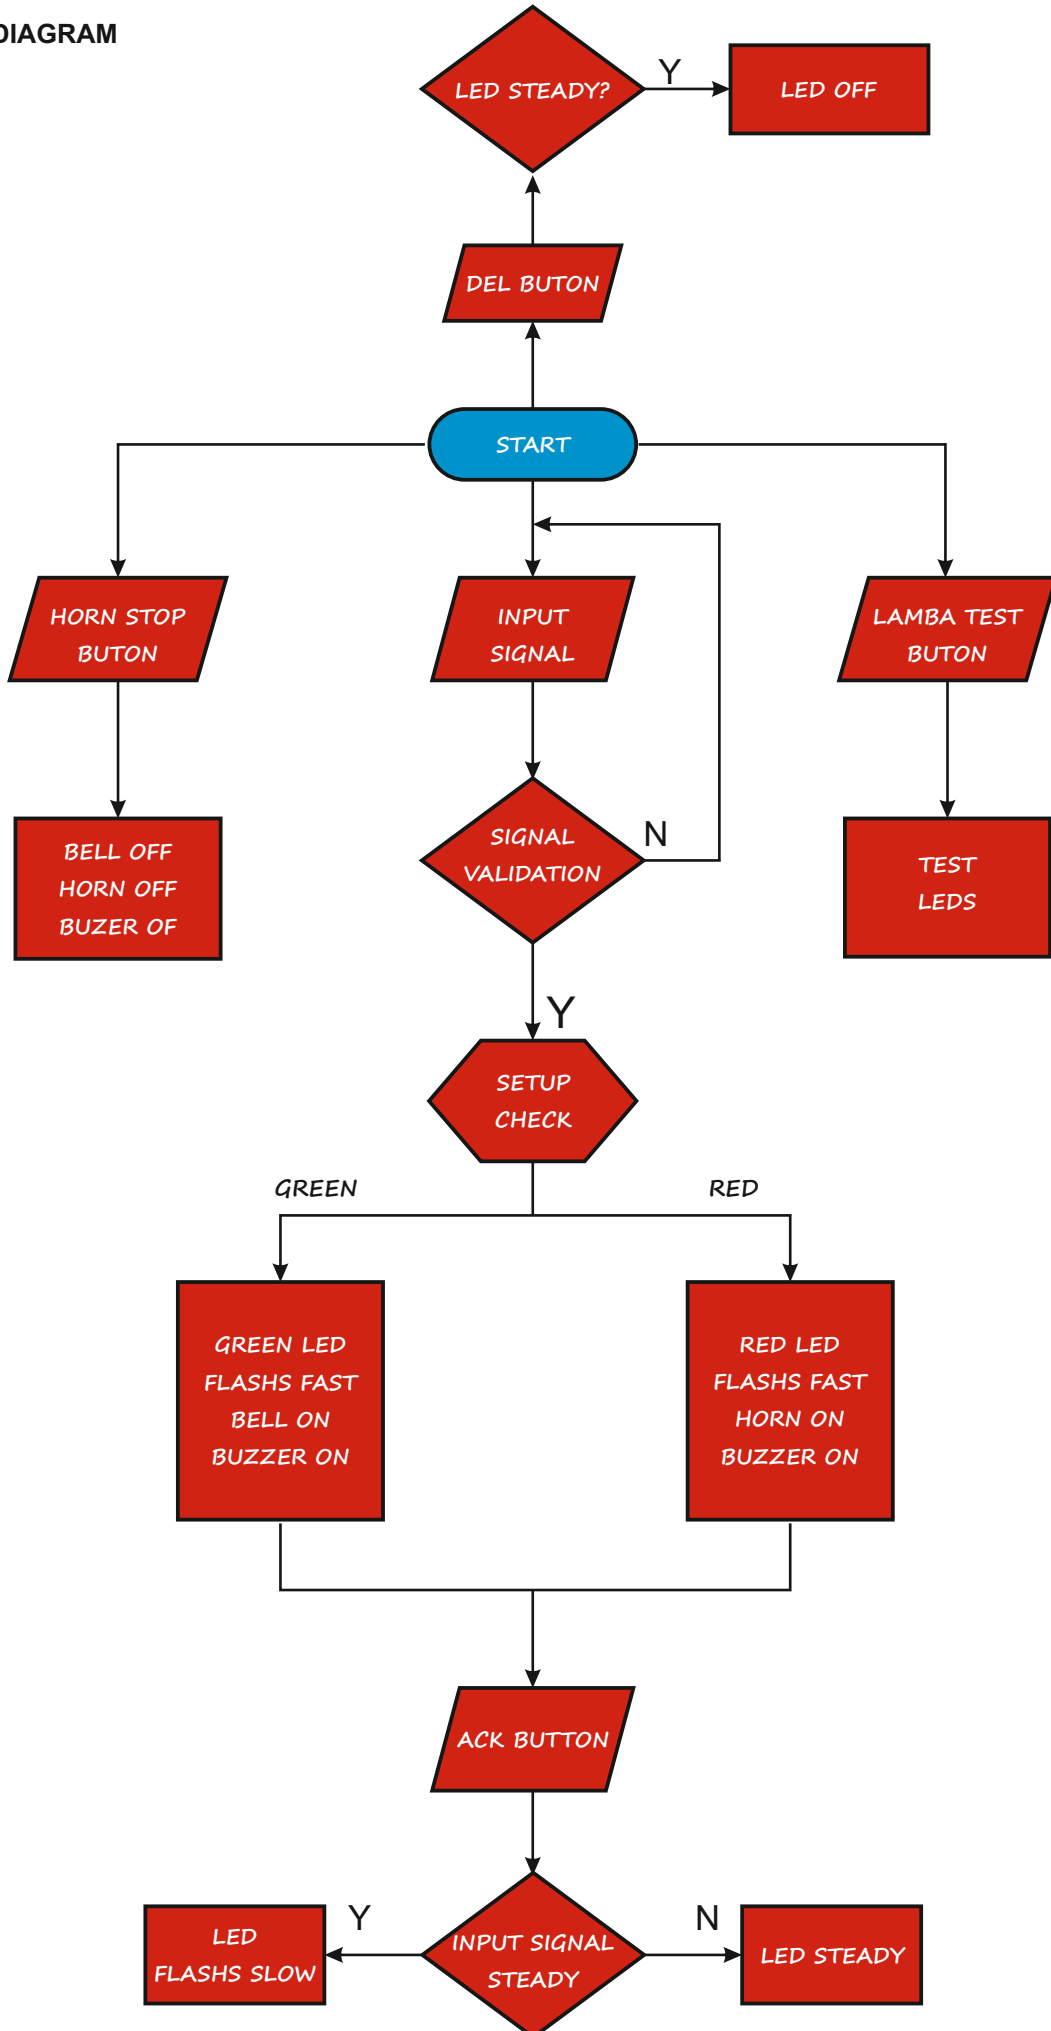

ORDERING TABLE

ORDER CODE	Description
ASB-8DB-24VDC	24VDC Supply Voltage
ASB-8DB-48VDC	48VDC Supply Voltage
ASB-8DB-110VDC	110VDC Supply Voltage
ASB-8DB-220VDC	220VDC Supply Voltage

BOX DIMENSION

